


KEY FEATURES

Model : C299HDM2E

- 1) Include Mega pixel 1.8mm lens, with IR-Cut, 170 Degrees of view angle
- 2) 3pcs Array LED, IR distance: 30m
- 3) Waterproof bullet AHD Camera
- 4) Effective pixels: 1920*1080
- 5) OSD menu optional, 4in1 AHD / CVI / TVI / CVBS can be adjusted by
Up / Down / left / right OSD button, can adjust image & functions freely
- 6) Transmitting distance up to 500M
- 7) Work with AHD / CVI / TVI / CVBS DVR according to camera mode.

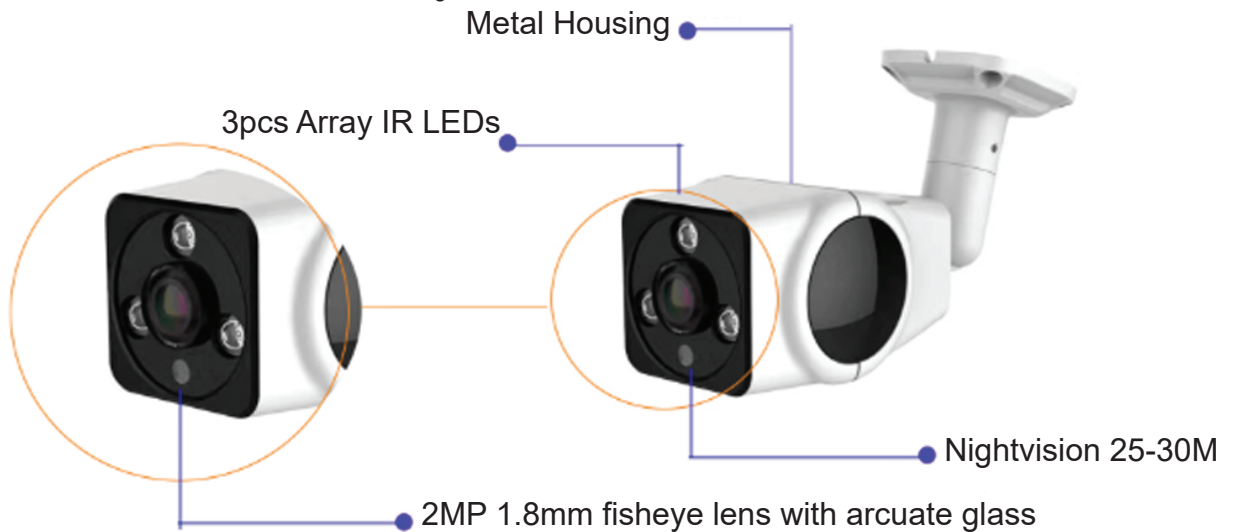

Specification

| | |
|------------------------------|---|
| Model | C299HDM2E |
| Image Sensor | 1/2.9" CMOS, SONY |
| Image Resolution | P: 25fps@1920(H)*1080(V) N: 30fps@1920(H)*1080(V) |
| Minimum Illumination | Color: 0.01Lux @ (F1.2,AGC ON),0 Lux with IR B&W: 0.001Lux@ (F1.2, AGC ON), 0Lux with IR |
| Electric Shutter | Auto |
| TV System | PAL/NTSC |
| Sync System | Internal |
| S/N Ratio | ≥50dB |
| Video Output | AHD/TVI/CVI/CVBS (960H) (BNC) |
| Lens | 1.8mm lens |
| IR Distance | 3pcs of Array LED, IR distance: 30m |
| IR Power On | CDS Auto Control |
| D&N Mode | ICR filter auto switch / Color / B&W |
| OSD | Optional |
| OSD Menu Language | EN, CN |
| DNR | 3D NR |
| Picture Adjustment | Yes |
| White Balance | Auto/Manual |
| Gain Control | Auto |
| Vandal-proof Housing | Yes |
| Power Input | DC12V±10% |
| Operation Temperature | Temperature -10°C~+50°C, Humidity less than 95%RH |
| Storage Temperature | Temperature -20°C~+60°C, Humidity less than 95%RH |
| Dimension | 187(L)*70(W)*60(H) mm |
| Weight | 400g |