


## Outdoor Security CMOS CAMERA


### KEY FEATURES

- 1/3" SONY Exmor 1200TVL, IMX238 solution
- IR-CUT, OSD MENU
- IR LED: 3 Array LED
- IR Distance: 15-30M
- Lens: 3.6MM

PRODUCT MODEL No. C3322SD

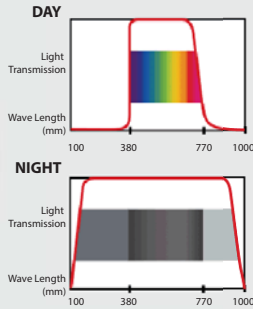

### DIMENSIONS

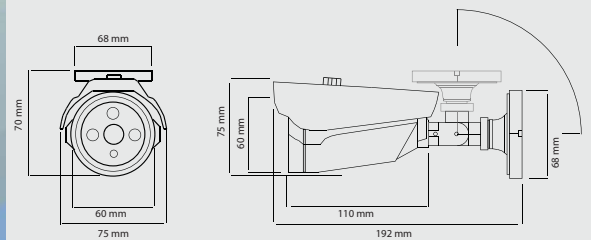

### SPECIFICATIONS

Camera Type:	Indoor IR Dome Camera
Image Sensor:	1/3" SONY Exmor 1200TVL, IMX238 solution
Support:	IR-CUT, OSD MENU
IR LED:	3 Array LED
IR Distance:	15-30M
TV System:	PAL/NTSC
Pixels: PAL:	512H×582V NTSC: 512H×492V
Lens:	3.6MM (default) / 6mm (optional)
Sync System:	Internal
Usable Illumination:	0.001 Lux (0 Lux LED ON)
S/N Ratio:	≥52dB (AGC OFF)
Video Out:	Composite Signal (1.0Vp-p, 75ω)
Scanning System:	625 Lines, 50 Field/Sec
Electronic Shutter Time:	1/50-1/100,000Sec
Operating Temperature:	-10° ~ +50° RH95% Max
Storage Temperature:	20° ~ +60° RH95% Max
Power Supply:	DC 12 V ±10%

PELA

Exmor™

View-DR

1200TVL



COLOR

