

## Outdoor Security CCD Camera


### KEY FEATURES

- ◆ 1/3"Sony SUPER HAD II CCD, Powerful DSP
- ◆ 700TVL
- ◆ 2.8mm~12mm Manual Zoom Lens
- ◆ IR LED:  $\phi 5 \times 42$ PCS
- ◆ IR LED working distance: 35m~40m
- ◆ Dual glass, no IR diffusion and fog
- ◆ Support Black Light Compensation (BLC)
- ◆ Support Hilight Compensation (HLC)
- ◆ IR Intensity can be adjusted
- ◆ OSD Menu

PRODUCT MODEL No. C4585SC



### DIMENSIONS

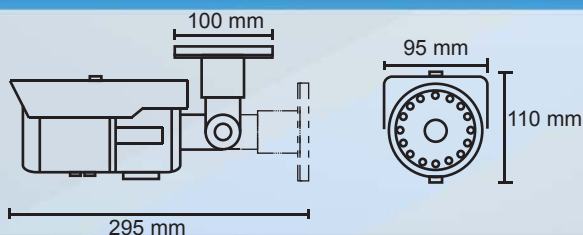

### IR LED



1/3" SONY CCD  
Colour Camera



IR Distance  
35m~40m



Water Resistance



Double Glass Prevent  
Fog and Light Leak

### SPECIFICATIONS

|                         |  |
|-------------------------|--|
| Image Sensor            | 1/3"Sony SUPER HAD II CCD, Powerful DSP                              |
| Horizontal Resolution   | 700 TVL  |
| Effective Pixels        | NTSC: 768H×494V(380K Pixels)<br>PAL: 752H×582V(440K Pixels)          |
| TV System               | PAL  |
| IR LED                  | $\phi 5 \times 42$ PCS   |
| IR Distance             | 35m~40m  |
| Lens                    | 2.8~12mm Lens  |
| Minimum illumination    | 0Lux (IR-LED on)   |
| White Balance           | Auto   |
| S/N Ration              | >48dB  |
| Infrared Wave Length    | 850nm  |
| IP Rating               | IP66   |
| Electronic shutter Time | 1/50(1/60)~1/100,000 sec ;   |
| Video output            | 1.0Vp-p , 75 $\Omega$ , BNC  |
| Power Consumption       | Max 390mA/ DC 12V ( IR-LED on)                                       |
| Operation Temp.         | -10 $^{\circ}$ C~50 $^{\circ}$ C (-14 $^{\circ}$ F~122 $^{\circ}$ F) |
| Storage Temp.           | -30 $^{\circ}$ C~60 $^{\circ}$ C (-22 $^{\circ}$ F~140 $^{\circ}$ F) |
| Operation Humidity      | Max. 90% RH  |
| Weight                  | 1.40Kg (Including Box and others)                                    |
| Dimensions              | 295mm (L) × 95mm(W) × 110mm(H)                                       |