


IP camera

PRODUCT MODEL No. IA222AS

KEY FEATURES

Day/Night	Color/ B&W (IR-CUT)
Compression	H.264/JPEG,Support record AVI format.
Image Config	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR, White Balance, BLC, FLK(Flicker Control)
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
WDR	YES
Recording Mode	NVR/NAS/CMS/Web
Language	Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian

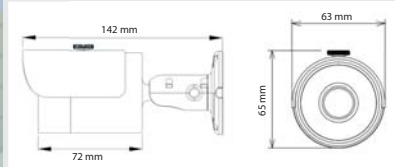

SPECIFICATIONS

Camera		Network	
Image Sensor	IMX222	Ethernet	RJ-45 (10/100Base-T)
Main processor	A5S66	Protocol	IPv4, HTTP, TCP/IP, FTP, NTP, RTSP, UDP, SMTP, DNS, DDNS
Resolution	1080P	ONVIF	Support ONVIF 2.4
Effective Pixels	1920(H)*1080(V)	P2P	YES, Support QR Code
TV System	PAL/NTSC	POE	Optional, Support IEEE 802.3af
Electronic Shutter Time	Auto: PAL 1/1-1/10000Sec; NTSC 1/1-1/10000Sec	WIFI	N/A
Sync System	External	Video Delay	0.3S (Within the Lan)
Usable Illumination	0.01Lux	Main Stream	1920*1080
S/N Ratio	≥52dB	Sub Stream	704*576, 352*288
Scanning System	Progressive	IE Brower	IE6-11
Video Output	Network	Smart Phone	iPhone, iPad, Android, Android Pad
Lens		General	
Focus Length	3.6mm	Housing	Weatherproof , IP66
Focus Control	Fixed	Anti-cut Bracket	YES, 3-Axis
Lens Type	Fixed	IR Cut Filter	YES
Pixels	3M Pixels	Operation Temperature	-10°C ~ +50°C RH95% Max
Night Vision		Storage Temperature	-20°C ~ +60°C RH95% Max
Infrared LED	∅ 5X30PCS	Power Source	DC12V±10%, 700mA
Infrared Distance	25M	Dimension	142(W)x65(H)x63(D)mm
IR Status	Under 10 Lux By CDS	Weight	500g
IR Power On	CDS Auto Control		

