


RECORDING
wired
DVR

DIMENSIONS



PRODUCT MODEL No. **D7204XQ**

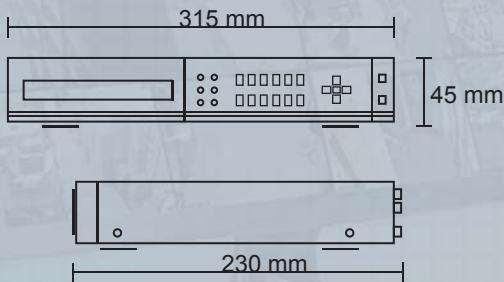

960H Technology
P2P Function

SPECIFICATIONS

System	User Interface	Graphic User Interface (OSD)
	OS	Embedded Linux
	Operation Mode	preview, record, playback, backup, network
	Password Security	Multi-level user management
A/V Input	Video input	4 in, BNC
	Audio input	4 in, RCA
A/V Output	HDMI output	Supports
	VGA output	Supports
	Display	1/4 optional
	Video standard	PAL/NTSC
	Loop	NO
	CVBS main output	1 out, BNC; Resolution: PAL:704*576, NTSC: 704*480
	Spot output	NO
	Audio output	1 out,RCA
A/V encoding parameters	Video compression	H.264
	Display frame rate	PAL:100 fps(4 x 25 fps); NTSC:120 fps(4 x 30 fps)
	Recording frame rate	PAL:100 fps(4 x 25 fps); NTSC:120 fps(4 x 30 fps)
	Video encoding resolution	PAL:WD1:960X576/WHD1:960*288/WCIF:480X288/D1:704X576/HD1:704*288/CIF 352X288 NTSC:WD1:960X480/WHD1:960*240/WCIF:480X240/D1:704X480/HD1:704*240/CIF 352X240
	Video frame rate	PAL: 1-25FPS NTSC:1-30FPS
	Video bit rate	WD1(D1):768-1536Kbps, WHD1(HD1):512-1280Kbps, WCIF(CIF):384-768Kbps; WQCIF(QCIF):192-384Kbps
	Stream Type	Video & Audio/Video
	Audio compression	ADPCM
	Recording mode	Always/Schedule/Alarm recording/Motion detection recording
	Video search	Time/Channel/Event
	Audio bit rate	8—32Kbps
	Dual-stream	Supports
	Mobile phone Monitor	Supports Android phone/iPhone/iPad/Blackberry
	Recording resolution	4CH WD1 Recroding & 4CH WD1 Realtime Playback; 4CH WCIF Recroding & 4CH WCIF Realtime Playback; 4CH D1 Recording & 4CH D1 Realtime Playback;
Playback simultaneously	1—4 CH optional	
HDD	Type	1 piece SATA
	Maximum capacity	4TB for each Sata connector
External connectors	Voice talk	NO
	Record mode	Audio & Video recording simultaneously
	Network protocol	Supports IE/PPPoE/DDNS/DHCP
	Domain name server	Support 88110,reelink,3322, dyndns, no-ip, changeip, dnsexit domain name server as default value.
	Network	1 RJ45 10M/100M
	Serial port	1 RS-485 serial port
	E-SATA Connector	NO
	USB Connector	2 USB
	Firmware update	Support USB update/Network update
	Alarm input	4 in
	Alarm output	1 out
	Operation Temperature	-10°C-- +55°C
Operation Humidity	10%--90%	
Power supply	12V 2A	
Chassis	Standard 1.0U	
Dimension	230mm (W)×315mm (D)×40mm (H)	
Weight(without HDD)	≤1.5Kg	

HDMI



Support
HDMI 2.0



33% more video



Cloud Technology
Easy installation



4 Channels DVR



Mobile Phone /
Web Ready